

## PRODUCT DATASHEET

# LEXAN™ SGC308

### DESCRIPTION

Matte-finish LEXAN™ SGC308 sheet for signs combines the impact strength of LEXAN polycarbonate sheet with a proprietary, UV-resistant surface treatment that protects it from weathering. LEXAN SG308 sheet is backed by a five-year limited warranty against yellowing, loss of light transmission and breakage#. LEXAN SGC308 sheet has a matte surface on one side and a polished surface on the other. It is ideally suited for all types of thermoformed or flat signs where reduced reflection and glare are required.

### TYPICAL PROPERTY VALUES\*

PROPERTY	TEST METHOD	UNITS	VALUE
<b>Physical</b>			
Specific gravity	ASTM D792	-	1.20
Light Transmission @.125" (Average)	ASTM D1003	%	82
Refractive Index @ 77°F	ASTM D542A	-	1.586
Rockwell Hardness	ASTM D785	-	M70,R118
<b>Mechanical</b>			
Tensile Strength @ Yield	ASTM D638	psi	9,000
@ Ultimate			9,000
Tensile Modulus	ASTM D638	psi	280,000
Flexural Strength	ASTM D790	psi	12,500
Flexural Modulus	ASTM D790	Psi	333,000
Elongation	ASTM D638	%	70
Poisson's Ratio	-	-	0.37
Compression Strength	ASTM D695	Psi	12,500
Izod Impact Strength, up to 125 mils	ASTM D256A	ft-lbs/in	
Notched			12-16
Drop Ball Impact Strength, 1/8" dia.dart @ .236 thickness	POLYVANTIS Test ##	ft-lbs	
@ 73°F			>200
@ 32°F			>200
@ 0°F			>200
<b>Thermal</b>			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x 10 <sup>-5</sup>
Specific Heat @ 40° C		cal/gm/°C	0.30
Heat Deflection Temperature	ASTM D648	°F	
@ 264 psi			260

PROPERTY	TEST METHOD	UNITS	VALUE
<b>Electrical</b>			
Dielectric Strength, Short Time @ 125 mils	ASTM D149	V/mil	380
Dielectric Constant, 23°C @ 60 Hz	ASTM D150	-	2.9
@ 1,000 Hz			2.9
@ 1,000,000 Hz			2.9
Dissipation Factor @ 60 Hz	ASTM D150		0.009
@ 1,000 Hz			0.01
Volume Resistivity @ 23°C	ASTM D257		$8 \times 10^{-16}$

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local POLYVANTIS Innovative Plastics, Specialty Film & Sheet representative.


# See actual Product Warranty for conditions that may apply.

## 5-lb steel ball dropped from a height of 40 feet.

### UL FILE NUMBER: 539257


### UV RESISTANCE

LEXAN™ SGC308 sheet was compared to acrylic in Florida weathering tests. After five years, LEXAN SG 308 sheet showed only minimal changes in light transmission and clarity.

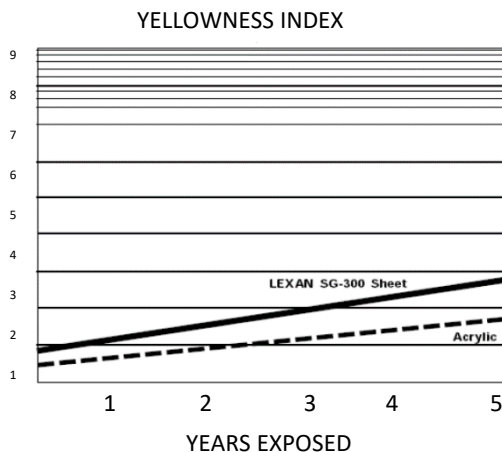

### IMPACT RESISTANCE

LEXAN™ SGC308 sheet has up to 30 times the impact strength of “Acrylic” and 10 times the impact strength of “Modified Acrylic”.

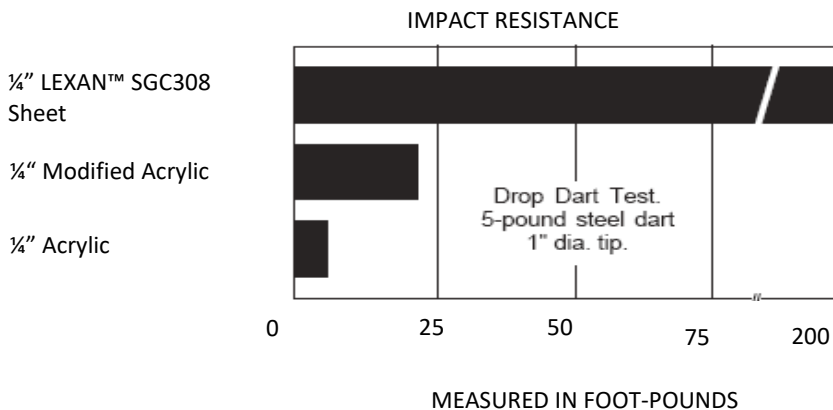

**POLYVANTIS**

[www.polyvantis.com](http://www.polyvantis.com)

